


# GROUP HANDWASHING STATION - DESIGN & COST



ITEMIZED BUDGET				
S.NO	ITEM	QUANTITY	RATE (RS)	AMT (RS)
1	1/4" HOLLOW STEEL TUBE	80 RFT	28	2240
2	1" CPVC PIPE	12 RFT	35	420
3	PVC TAPS	12 PCS	100	1200
4	SOAP CASE	12 PCS	40	480
5	G.I CLAMP	5 PCS	10	50
6	1" X1/2" CPVC TEE	12 PCS	75	900
7	1" CPVC END CAP	1 PC	20	20
8	STEEL NIPPLE	12 PCS	10	120
9	SOLUTION	230 GRM	320	320
10	G.I SHEET SINK (U SHAPE)	42 SQFT	115	4830
11	1/4" WASTE	1 PC	35	35
12	PVC DRAIN PIPE	1 PC	50	50
13	CEMENT & SAND FOR GROUTING	LS		200
14	LABOUR FOR ASSEMBLING	LS		2000
15	OIL PAINT	LS		500
16	TRANSPORTATION	LS		500
17	MISC			335
<b>TOTAL</b>				<b>14000</b>

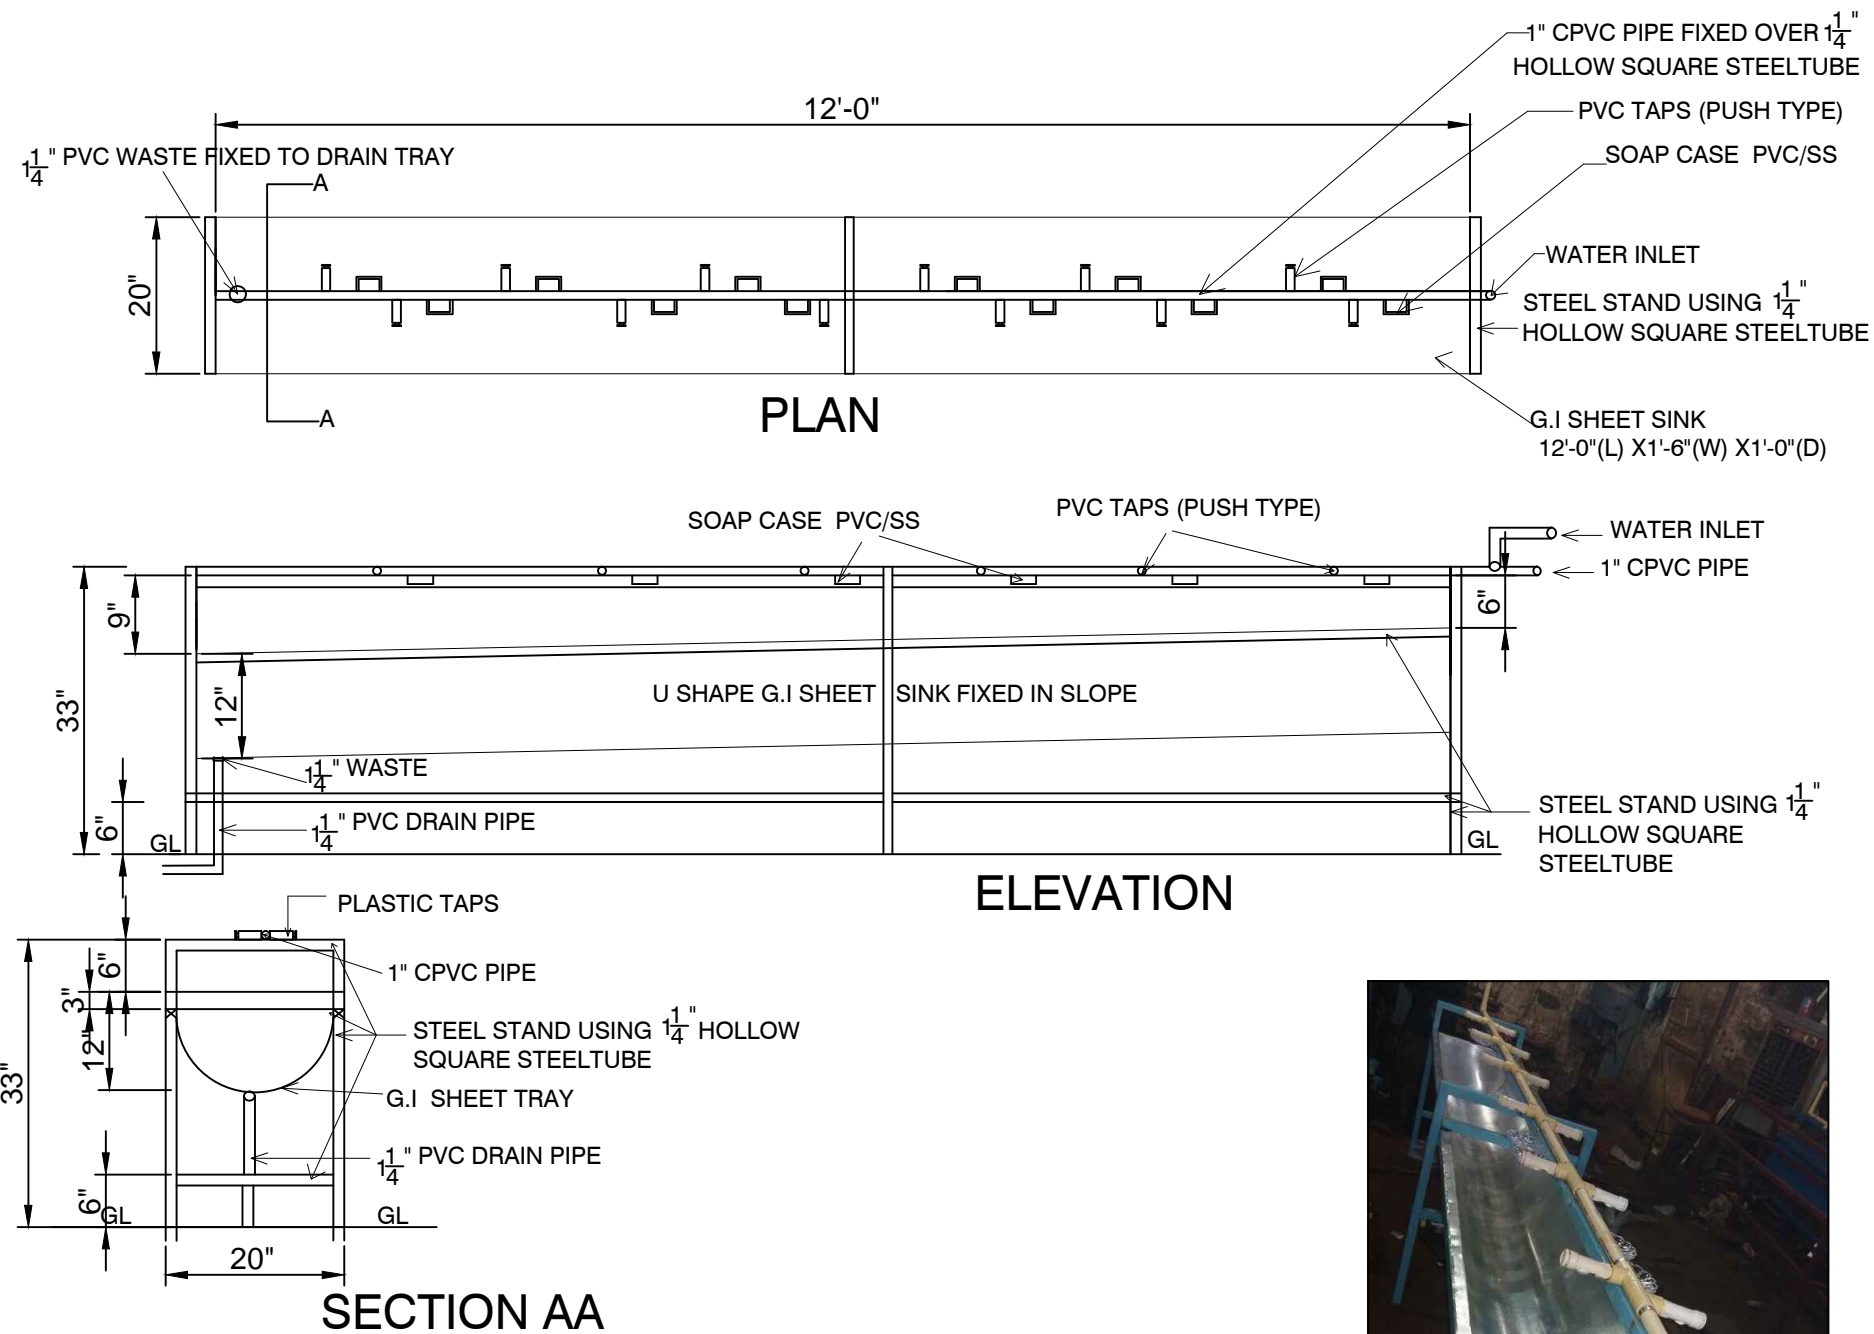

**VENDOR**  
**BRIJ BHUSHAN SAINI**  
 L-1 GALLI NO. 18 ASTHAL MANDIR ROAD, SANGAM VIHAR  
 MOBILE NO. 9810185975